



MINI CONSTANT CURRENT IP65 NON DIMMABLE

DRMACC

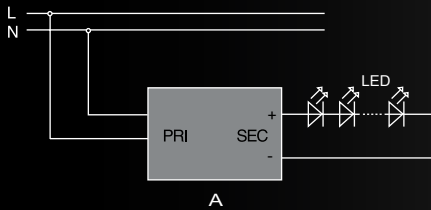

- Non Dimmable
- 5 Year Warranty
- Universal AC Input
- Constant Current [Series Circuit]
- Operating temp range -20.. +50°C
- SELV Equivalent
- Overload / Short Circuit Protection
- Overheat protection
- Self extinguishing Plastic housing
- Safe no load operation

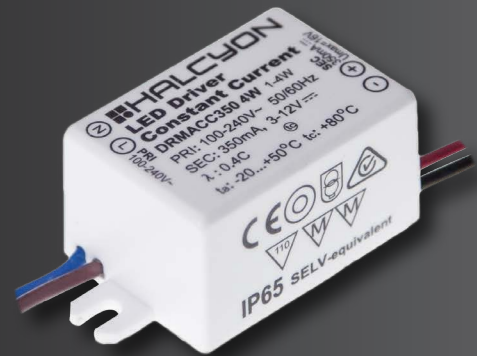

| CODE | OUTPUT CURRENT [mA] | MIN/MAX OUTPUT [W] | INPUT VOLTAGE [V] | OUTPUT VOLTAGE [V] | POWER FACTOR [λ] | DIMENSIONS L x W x H [mm] | INGRESS PROTECTION |
|----------------|---------------------|--------------------|-------------------|--------------------|------------------|---------------------------|--------------------|
| DRMACC350 4W | 350mA | 1-4W | 240V | 2-12V | 0.40C | L38 x W27 x H21mm | IP65 |
| DRIPACC350 10W | 350mA | 7-10W | 240V | 10-32V | 0.95 | L70 x W34.5 x H22mm | IP65 |
| DRMACC350 12W | 350mA | 4-12W | 240V | 12-35V | 0.95 | L50 x W48 x H24mm | IP65 |
| DRMACC700 4W | 700mA | 1-4W | 240V | 2-6V | 0.40C | L38 x W27 x H21mm | IP65 |
| DRMACC700 12W | 700mA | 4-12W | 240V | 6-17V | 0.95 | L50 x W48 x H24mm | IP65 |