


CONSTANT VOLTAGE 12V STANDARD

DRACV12



- Universal AC Input / Full range
- 5 Year Warranty
- Captured terminal screws
- Constant Voltage [Parallel Circuit]
- SELV Equivalent
- Operating temp range -20..+50°C
- Overload / Short Circuit Protection
- Overheat protection
- Self extinguishing Plastic housing
- Protection Class II

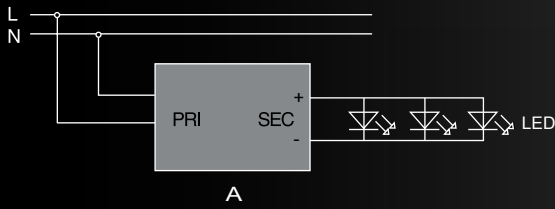

CODE	OUTPUT CURRENT [A]	MAX OUTPUT [W]	INPUT VOLTAGE [V]	OUTPUT VOLTAGE [V]	POWER FACTOR [λ]	DIMENSIONS L x W x H [mm]	INGRESS PROTECTION
DRACV12 20W	0 - 1.7A	20W	240V	12V	0.80C	L113 x W44 x H28mm	IP20
DRACV12 36W	0 - 3.0A	36W	240V	12V	0.95	L166 x W52 x H24mm	IP20
DRACV12 40W	0 - 3.33A	40W	240V	12V	0.95	L166 x W52 x H24mm	IP20
DRACV12 50W	0 - 4.2A	50W	240V	12V	0.95	L184 x W61 x H32mm	IP20
DRACV12 60W	0 - 5.00A	60W	240V	12V	0.95	L184 x W61 x H32mm	IP20
DRACV12 75W	0 - 6.25A	75W	240V	12V	0.95	L184 x W61 x H32mm	IP20
DRACV12 150W	0 - 12.5A	150W	240V	12V	0.95	L223 x W70 x H40mm	IP67
DRACV12 200W	0 - 16.8A	200W	240V	12V	0.95	L249 x W70 x H40mm	IP67