



MINI CONSTANT CURRENT IP65 NON DIMMABLE

DRMACC

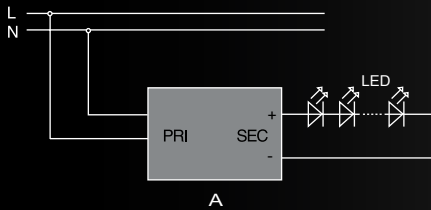

- Non Dimmable
- 5 Year Warranty
- Universal AC Input
- Constant Current [Series Circuit]
- Operating temp range -20.. +50°C
- SELV Equivalent
- Overload / Short Circuit Protection
- Overheat protection
- Self extinguishing Plastic housing
- Safe no load operation

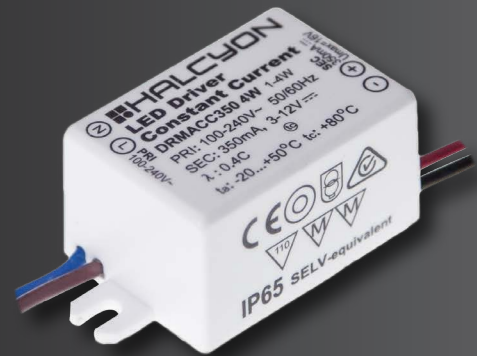

CODE	OUTPUT CURRENT [mA]	MIN/MAX OUTPUT [W]	INPUT VOLTAGE [V]	OUTPUT VOLTAGE [V]	POWER FACTOR [λ]	DIMENSIONS L x W x H [mm]	INGRESS PROTECTION
DRMACC350 4W	350mA	1-4W	240V	2-12V	0.40C	L38 x W27 x H21mm	IP65
DRIPACC350 10W	350mA	7-10W	240V	10-32V	0.95	L70 x W34.5 x H22mm	IP65
DRMACC350 12W	350mA	4-12W	240V	12-35V	0.95	L50 x W48 x H24mm	IP65
DRMACC700 4W	700mA	1-4W	240V	2-6V	0.40C	L38 x W27 x H21mm	IP65
DRMACC700 12W	700mA	4-12W	240V	6-17V	0.95	L50 x W48 x H24mm	IP65