

**MANROSE**  
DESIGNER SERIES

**QUIET**

**125mm BATHROOM FANS**

**& 150mm HIGH STEAM BATHROOM & KITCHEN FANS**



Quiet fans range now includes  
**NEW HUMIDITY MODELS**

Model	Standard Switching	Timer Switching	Humidity Control
<b>125mm</b> Wall/Ceiling Mount Fans	FAN7180	FAN7181	FAN7182
<b>150mm</b> Wall/Ceiling Mount Fans	FAN7183	FAN7184	FAN7185

**Wall/Ceiling Fans - Quiet**

The new high-pressure and energy-efficient QUIET fans have ultra-high airflow without nuisance noise and are designed to be ducted straight through a bathroom or kitchen exterior wall. 5 year warranty.

Designer QUIET	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Switching	Order Code
					(l/s)	(m <sup>3</sup> /hr)				
	150	Axial	22	138	114	410	0.19	41	Standard	FAN7183
									Timer	FAN7184
									Humidity Control	FAN7185
	125	Axial	15	68	54	194	0.28	38	Standard	FAN7180
									Timer	FAN7181
									Humidity Control	FAN7182

*Note: Installed system performance is always influenced by duct length and layout*

**Switching Options**


**Standard** Remote switch (not supplied).

**Timer** Remote switch (not supplied). Fan continues operating for preset time after switching off. Timers are 2-30 minute adjustable and require permanent and switched phase.

**Humidity** Remote switch (not supplied). The humidity control models come with an advanced inbuilt humidity automation controller.

**Dimensions (mm)**

Model	A	B	C	D
FAN7183 FAN7184 FAN7185	227	30.5	111	Ø146
FAN7180 FAN7181 FAN7182	185	29	100	Ø120

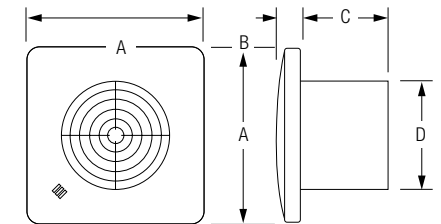

**Technical**

Model	FAN7183	FAN7184	FAN7185	FAN7180	FAN7181	FAN7182
<b>Supply</b>	220-240V AC, 50Hz					
<b>Max. Operating Temp</b>	40°C					
<b>IP Rating</b>	IP45					